




Feed through entry panel, 102mm (4"), 6 holes, 2x3

Product Description

Aluminum feed through entry panels enable transmission line runs to enter buildings and shelters. These rugged panels guide the transmission line at the entry point and prevent moisture from entering the building. Each panel features 102mm (4") openings to accept boot assemblies. Feed through panels are offered with a broad selection of hole patterns and plate sizes to match your exact application. These entries can be used in both interior and exterior wall applications to create a neat and clean installation. Each panel includes a set of wall attachment hardware, including stainless steel screws, finishing washers and plastic anchors and is powder coated to ensure long term integrity and provide appealing aesthetics. Protection caps for all unused openings are also included. These caps are only dust protection offered. For water proofing suitable additional measures, e.g. tape wrap. Boot assemblies are purchased separately to accommodate specific transmission line requirements.




Features/Benefits

Technical Specifications

Product Line	Elliptical Waveguide Accessories, Coaxial Cable Accessories
Product Type	Wall/Roof Feed-Through System
Feed-Through Component	Aluminum Feed-Through Entry Panel
Coaxial Cable Type	Air Dielectric, Foam Dielectric
Feed-Through Holes	6
Feed-Through Hole Diameter, mm (in)	102 (4)
Configuration	2 x 3
Color	Grey
Material	Aluminium
Package Quantity	1
Weight per piece, kg (lb)	2.3 (4.95)
Box Dimensions (Bulk Shipping), L x W x H mm (in)	610 x 457 x 51 (24 x 18 x 2)

Notes

Other Documentation

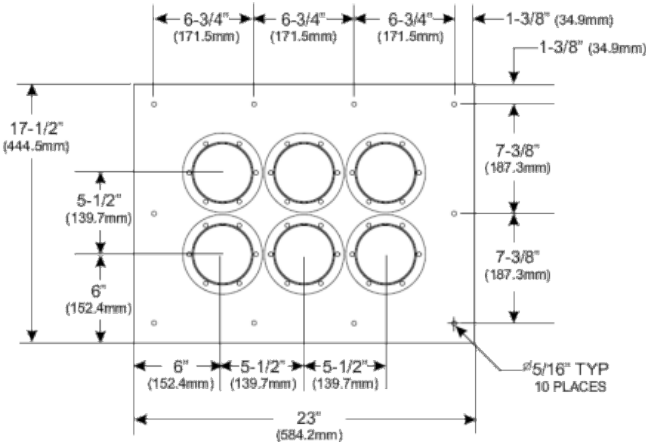

All information contained in the present datasheet is subject to confirmation at time of ordering